



Press-fitting terminals made of AISI 316 stainless steel

Code	Version	Ø cable size mm	D3 mm	D1 mm	D2 mm	L2 mm	A mm
05.190.25	Eye	2.5	5.5	2.5	5.5	32	3
05.190.03	Eye	3	6.5	3.5	6.35	38	4
05.190.04	Eye	4	8.5	4.4	7.5	45	5
05.190.05	Eye	5	10.5	5.3	9	51	6
05.190.06	Eye	6	13	6.3	12.5	64	8
05.190.07	Eye	7	13	7.5	14.3	70	9
05.190.08	Eye	8	14.5	8.4	16	83	10
05.190.10	Eye	10	16.3	10.5	17.8	89	11
05.190.12	Eye	12	19.3	12.5	21.4	105	15
05.191.25	Toggle	2.5	5	2.5	5.5	32	-
05.191.03	Toggle	3	5	3.5	6.35	38	-
05.191.04	Toggle	4	8	4.4	7.5	45	-
05.191.05	Toggle	5	10	5.3	9	51	-
05.191.06	Toggle	6	12	6.3	12.5	64	-
05.191.08	Toggle	8	12	8.4	16	83	-
05.191.10	Toggle	10	16	10.5	17.8	89	-
05.191.12	Toggle	12	19	12.5	21.4	105	-
05.193.03	Swivel toggle	3	6.3	3.5	6.35	38	-
05.193.04	Swivel toggle	4	8	4.4	7.5	45	-
05.193.05	Swivel toggle	5	9.5	5.3	9	51	-
05.193.06	Swivel toggle	6	11	6.3	12.5	64	-

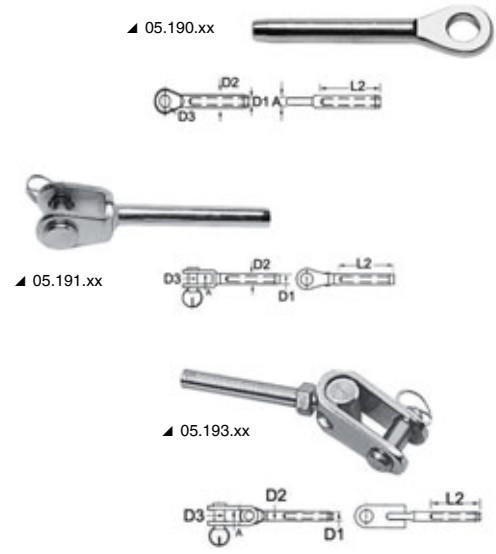

► AISI 316 stainless steel terminals, Danish system


Fast and simple installation by placing the steel cable into the hole.

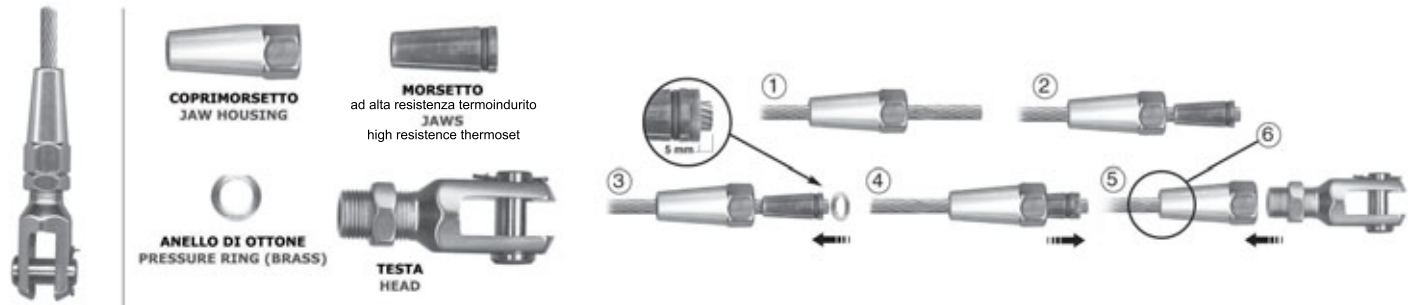

Eyelet terminals

To be used with AISI316 stainless steel 19/49/133-wire ropes.


Code	For cables mm	L3 mm	A mm	D1 mm	D2 mm	Break load kg
05.219.03	3	58	6	3	6.5	700
05.219.04	4	68	7	4	8.3	1500
05.219.05	5	78	8	5	10.3	2180
05.219.06	6	94	9	6	12.3	3700
05.219.08	8	116	10.5	8	14.3	5600
05.219.10	10	131	13	10	16.3	8300
05.219.12	12	155	15	12	19.5	12000

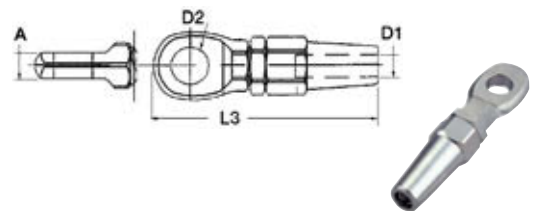

Fork terminals

To be used with AISI316 stainless steel 19/49/133-wire ropes.

Code	For cables mm	L3 mm	A mm	D1 mm	D2 mm	Break load kg
05.408.03	3	63	6	3	6	700
05.408.04	4	73	8	4	8	1550
05.408.05	5	80	10	5	10	2180
05.408.06	6	92	12	6	12	3700
05.408.08	8	113	14	8	14	5600
05.408.10	10	131	16	10	16	8300
05.408.12	12	157	18	12	19	12000

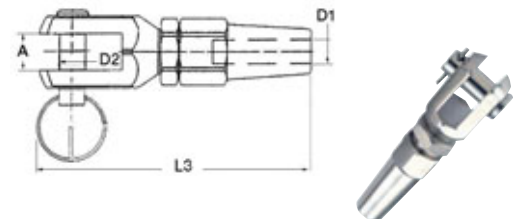

Terminals for fitting into tensioners with right metric screw threads

To be used with AISI316 stainless steel 19/49/133-wire ropes.

Code	For cables mm	L3 mm	D1 mm	G metric mm	Break load kg
05.004.06	3	47	3	6	700
05.004.08	4	57	4	8	1500
05.004.10	5	63	5	10	2180
05.004.12	6	80	6	12	3700
05.004.14	8	89	8	14	5600
05.004.16	10	100	10	16	8300

